



	FIXED CALIPER	P4.30/34 g
		20.9230. <sup>11</sup> / <sub>21</sub>

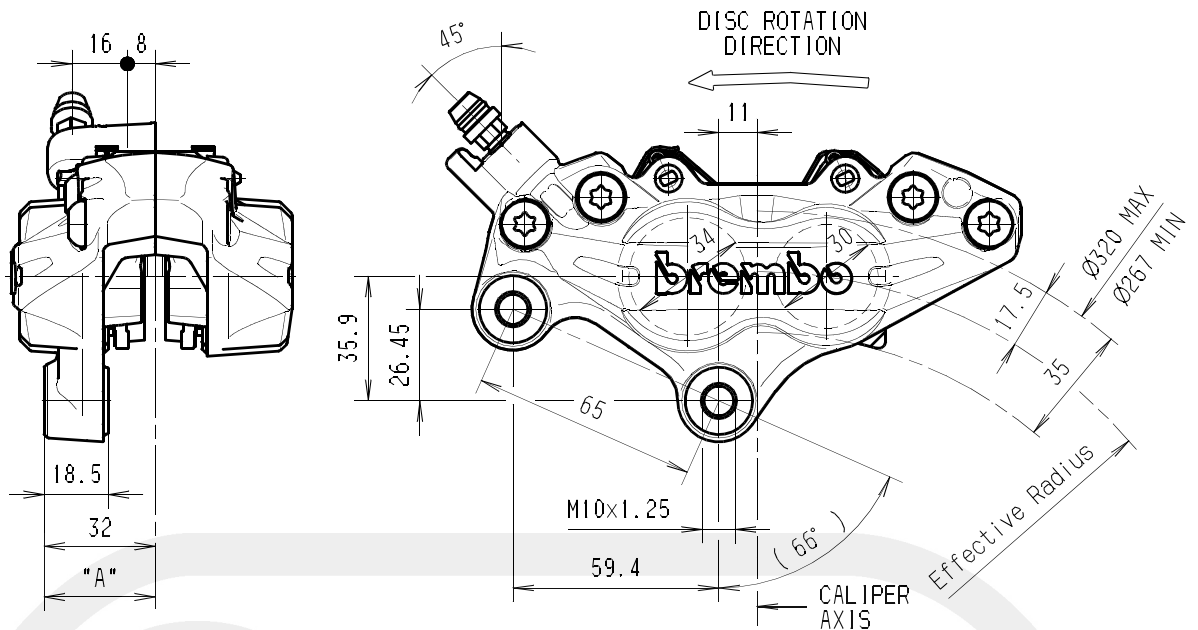

### DESCRIPTION

Fixed caliper with 4 opposed pistons, realized by semicalipers joined by bolts.  
Construction Material: Aluminium Alloy.  
Operating fluid: brake fluid DOT4.  
N.B.: Drawing shows left side caliper.  
Code 20.9230.11.  
Code 20.9230.21 specular.  
Mounting side behind the fork.

### PADS SHAPE AND DIMENSIONS

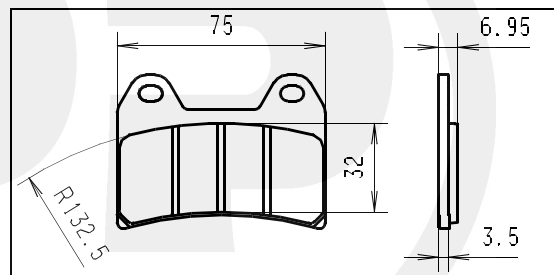

### TECHNICAL CHARACTERISTICS

Pistons number and diameter: 4 30/34 mm	Average pad surface (1 pad): 21.1 cm <sup>2</sup>
MAX working pressure: 70 bar	Weight (with not sintered pad): 1.000 kg
"A" Disc position (TOLERANCE):	
Disc thickness 5.0 mm ±0.8 mm	
Disc thickness 4.5 mm ±0.8 mm	
Disc thickness 4.0 mm ±0.8 mm	

### CONFIGURATION

CHARACT. CODE CALIPER	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.9230. <sup>11</sup> / <sub>21</sub>	FERIT I/D 450 FF	GOLD	SX DX	5.0 mm 4.5 mm 4.0 mm	10.4 cm <sup>3</sup>

### AVAILABLE SPARE PARTS

CHARACT. CODE CALIPER	SPARE PARTS	PADS	BLEEDER SCREW	DUST COVER	RETAINERS	PIN RETAINER	PAD SPRING
20.9230. <sup>11</sup> / <sub>21</sub>		107.6708.55	105.3387.53	105.1502.10	105.4542.18	120.3942.30	120.2255.90

Indicating informations subject to modification.  
For further specifications contact Technical Section.

LAST UPDATE: 26/02/2004