



	FIXED CALIPER	P4.30/34 g
		20.9230. ⁵⁰ / ₆₀

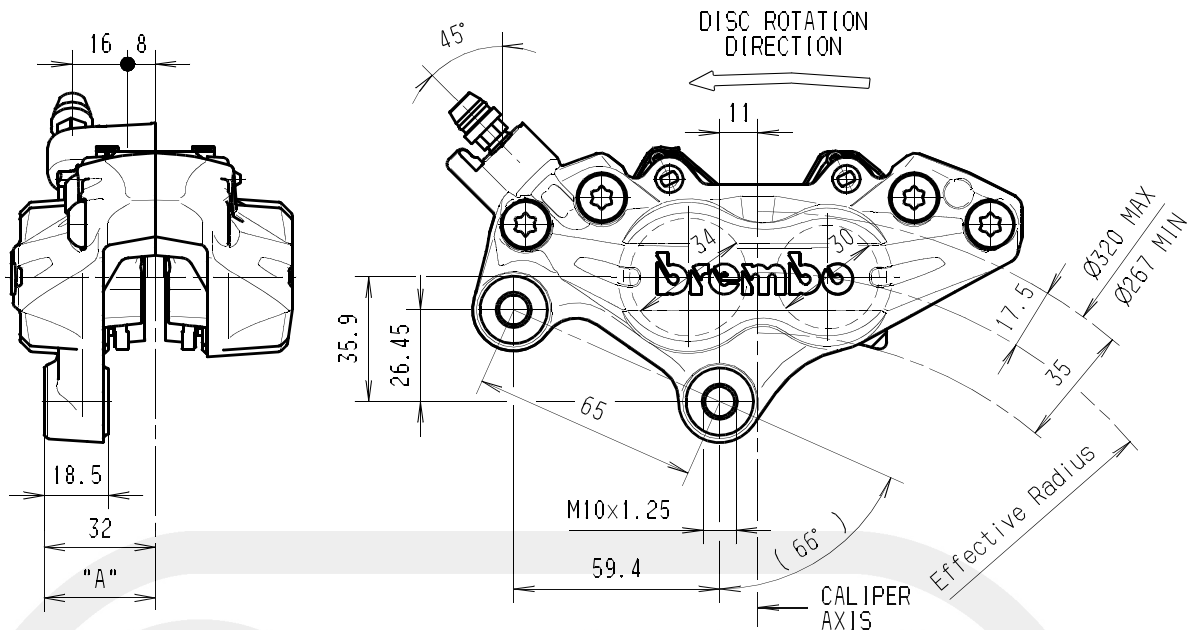

DESCRIPTION

Fixed caliper with 4 opposed pistons, realized by semicalipers joined by bolts.
Construction Material: Aluminium Alloy.
Operating fluid: brake fluid DOT4.
N.B.: Drawing shows left side caliper.
Code 20.9230.50.
Code 20.9230.60 specular.
Mounting side behind the fork.

PADS SHAPE AND DIMENSIONS

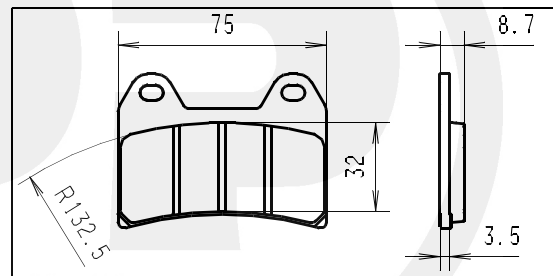

TECHNICAL CHARACTERISTICS

Pistons number and diameter: 4 30/34 mm	Average pad surface (1 pad): 21.1 cm ²
MAX working pressure: 70 bar	Weight (with not sintered pad): 1.040 kg
"A" Disc position (TOLERANCE):	
Disc thickness 5.0 mm ±0.8 mm	
Disc thickness 4.5 mm ±0.8 mm	
Disc thickness 4.0 mm ±0.8 mm	

CONFIGURATION

CHARACT. CODE CALIPER	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.9230. ⁵⁰ / ₆₀	FERIT 1/D 450 FF	BLACK	SX DX	5.0 mm 4.5 mm 4.0 mm	16.1 cm ³

AVAILABLE SPARE PARTS

CHARACT. CODE CALIPER	SPARE PARTS	PADS	BLEEDER SCREW	DUST COVER	RETAINERS	PIN RETAINER	PAD SPRING
20.9230. ⁵⁰ / ₆₀		107.6708.10	105.3387.53	105.1502.10	105.4542.18	120.3942.30	120.2255.90

Indicating informations subject to modification.
For further specifications contact Technical Section.

LAST UPDATE: 26/02/2004