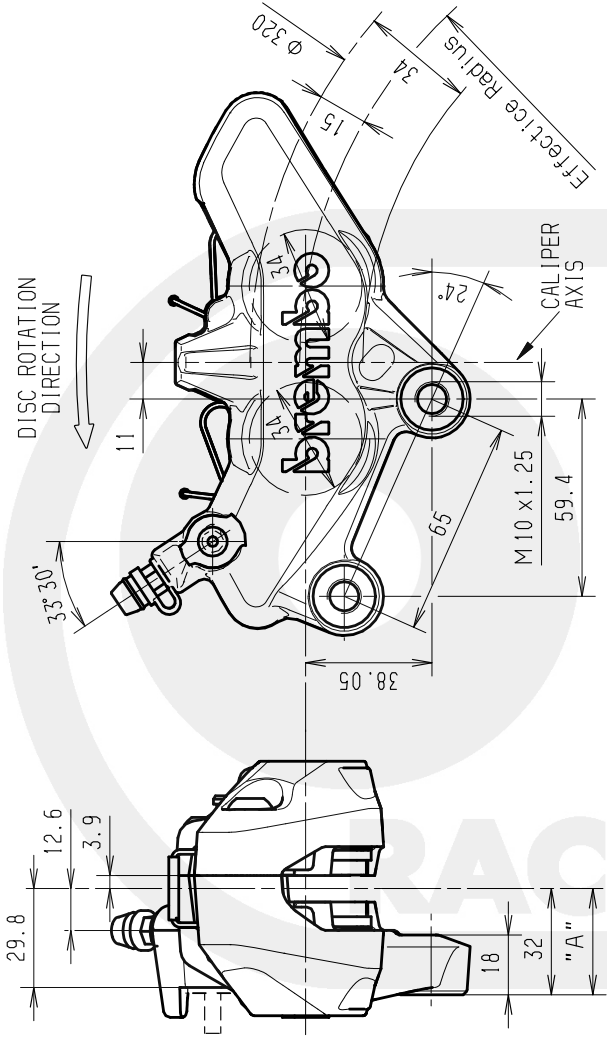
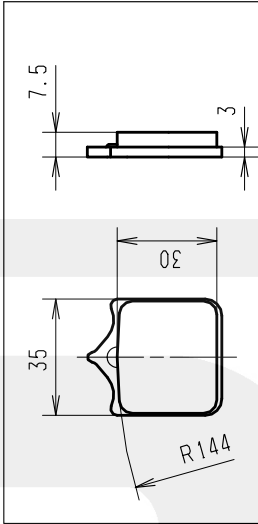


	FIXED CALIPER P4.34 a 20.7850.10 D																									
	DESCRIPTION Fixed caliper with 4 opposed pistons, realized by senicalipers joined by bolts. Construction Material: Aluminium Alloy. Operating fluid: brake fluid DOT4. N.B.: Drawing shows left side caliper. Code 20.7850.10. Code 20.7850.20 specular. Mounting side behind the fork.	PADS SHAPE AND DIMENSIONS 																								
TECHNICAL CHARACTERISTICS Pistons number and diameter: 4 34 mm MAX working pressure: 70 bar "A" Disc position (TOLERANCE): Disc thickness 5.0 mm Disc thickness 4.5 mm	CONF IGURATION <table> <tr> <th>CODE CALIPER</th><th>CHARACT.</th><th>PADS FRICTION MATERIAL</th><th>BODY COLOR</th><th>MOUNT. SIDE</th><th>USABLE DISCS THICKNESS</th><th>BRAKE FLUID FOR PADS WEAR</th></tr> <tr> <td>20.7850.20</td><td>10</td><td>TOSHIBA TT 2802 GG</td><td>GOLD</td><td>SX DX</td><td>5.0 mm 4.5 mm</td><td>14.2 cm³</td></tr> </table>	CODE CALIPER	CHARACT.	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR	20.7850.20	10	TOSHIBA TT 2802 GG	GOLD	SX DX	5.0 mm 4.5 mm	14.2 cm ³	AVAILABLE SPARE PARTS <table> <tr> <th>SPARE PARTS CODE CALIPER</th><th>PADS</th><th>BLEEDER SCREW</th><th>DUST COVER</th><th>SPRING PIN</th></tr> <tr> <td>20.7850.20</td><td>107.7855.11</td><td>105.3387.52</td><td>105.1502.20</td><td>122.4849.56</td></tr> </table>	SPARE PARTS CODE CALIPER	PADS	BLEEDER SCREW	DUST COVER	SPRING PIN	20.7850.20	107.7855.11	105.3387.52	105.1502.20	122.4849.56
CODE CALIPER	CHARACT.	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR																				
20.7850.20	10	TOSHIBA TT 2802 GG	GOLD	SX DX	5.0 mm 4.5 mm	14.2 cm ³																				
SPARE PARTS CODE CALIPER	PADS	BLEEDER SCREW	DUST COVER	SPRING PIN																						
20.7850.20	107.7855.11	105.3387.52	105.1502.20	122.4849.56																						
Indicating informations subject to modification. For further specifications contact Technical Section.	LAST UPDATE: 29/07/2002																									