


RS407 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY
FOR RACE USE ONLY

800.440.3559 | WWW.VORTEXRACING.COM



-Apply grease to all bearings and use a thread locking agent on all bolts.




STOCK
POSITION

Thank You for purchasing VORTEX Rear Sets!

These Rear Sets are intended for race use only and should be installed by a certified mechanic. Your new Rear-Sets adjust from the stock position - 20mm up, 20mm back and 10mm down. Each adjustment hole moves in 10mm increments.

1. Install one stainless steel shim on each side of the brake & shift lever.
2. Apply grease to all bearings & use a thread locking agent on all bolts.
3. Rear sets come with 2 different length shift rods. Footpeg position determines which shift rod you will utilize.
4. You may need a longer brake line hose for certain footpeg positions.
5. For reverse (GP) shifting pattern, turn shift knuckle upside down before attaching the Vortex shift rod.

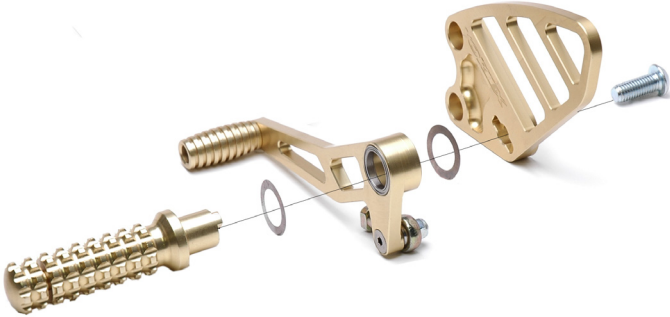

CHECK ALL NUTS, BOLTS, AND FUNCTION OF BRAKE SYSTEM PRIOR TO RIDING MOTORCYCLE

IMPORTANT INFORMATION ABOUT YOUR BRAKE LIGHT

Although VORTEX Rear-Sets are designed for race use, if you would like to retain rear brake light functionality from the rear brake lever please order the in-line pressure switch, VORTEX Part #RS100 through your dealer or www.vortexracing.com


RS407 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY
FOR RACE USE ONLY

800.440.3559 | WWW.VORTEXRACING.COM



-Apply grease to all bearings and use a thread locking agent on all bolts.




STOCK
POSITION

Thank You for purchasing VORTEX Rear Sets!

These Rear Sets are intended for race use only and should be installed by a certified mechanic. Your new Rear-Sets adjust from the stock position - 20mm up, 20mm back and 10mm down. Each adjustment hole moves in 10mm increments.

1. Install one stainless steel shim on each side of the brake & shift lever.
2. Apply grease to all bearings & use a thread locking agent on all bolts.
3. Rear sets come with 2 different length shift rods. Footpeg position determines which shift rod you will utilize.
4. You may need a longer brake line hose for certain footpeg positions.
5. For reverse (GP) shifting pattern, turn shift knuckle upside down before attaching the Vortex shift rod.

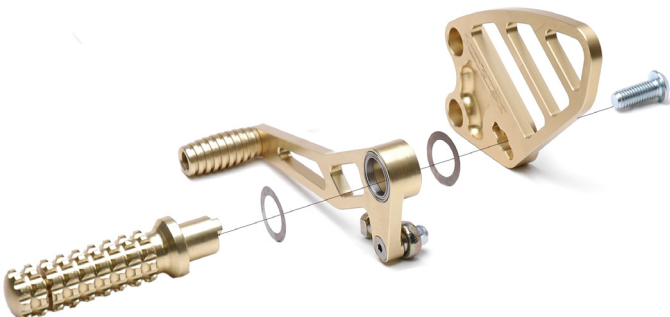

CHECK ALL NUTS, BOLTS, AND FUNCTION OF BRAKE SYSTEM PRIOR TO RIDING MOTORCYCLE

IMPORTANT INFORMATION ABOUT YOUR BRAKE LIGHT

Although VORTEX Rear-Sets are designed for race use, if you would like to retain rear brake light functionality from the rear brake lever please order the in-line pressure switch, VORTEX Part #RS100 through your dealer or www.vortexracing.com