


	<b>FLOATING CALIPER</b>	<b>PF 30/32</b>
		<b>22.5555.11</b>

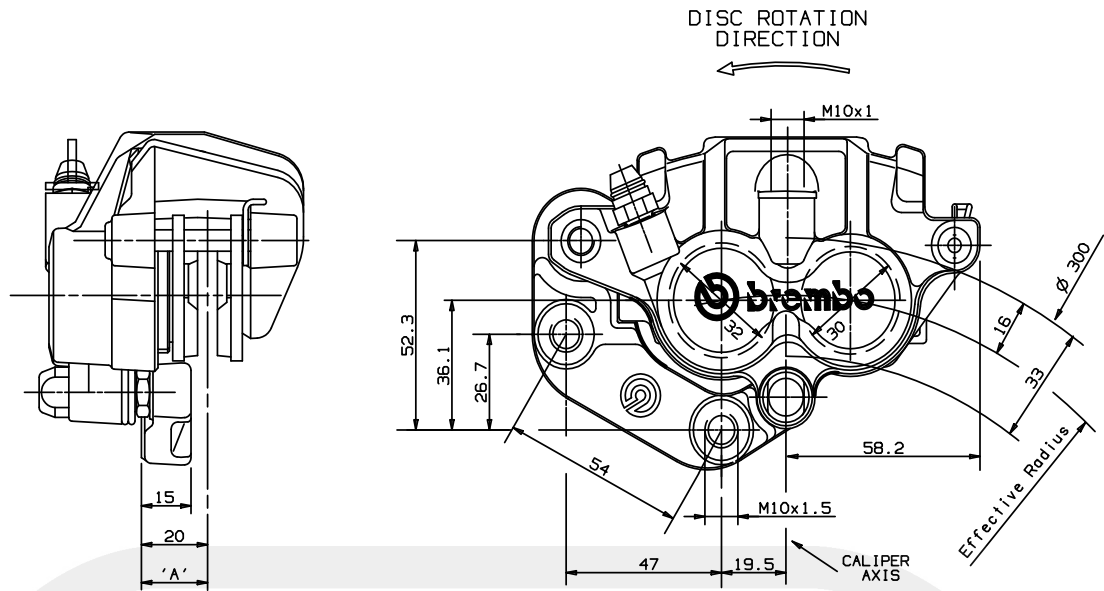


### DESCRIPTION

Floating caliper with 2 pistons.  
Caliper's body slides on one bracket.  
Pads are supported by one pin and one bracket.  
Construction Material: Aluminium Alloy.  
Operating fluid: brake fluid DOT3+4.

N.B.: drawing shows left side caliper.  
Mounting side behind the fork.

### PADS SHAPE AND DIMENSIONS

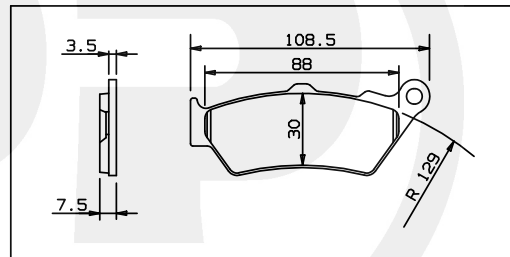

### TECHNICAL CHARACTERISTICS

Pistons number and diameter:	2 30/32mm	Average pad surface (1 pad):	23.4 cm <sup>2</sup>
MAX working pressure:	70bar	Weight (with not sintered pads):	0.935 Kg
A) Disc position (TOLERANCE):	±0.5 mm		
Usable disc diameter:	300 mm		

### CONFIGURATION

CODE CALIPER	CHARACT.	PADS FRICTION MATERIAL	BODY COLOR	BRACKET COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
22.5555.11		FERIT I/D 450 FF	BLACK	BLACK	SX	5.0 mm	13.10 cm <sup>3</sup>

### AVAILABLE SPARE PARTS

CODE CALIPER	SPARE PARTS	PADS	BLEEDER SCREW	DUST COVER	BOOTS
22.5555.11		107.5270.11	105.3246.11	105.1502.10	122.4746.14

Indicating informations subject to modification.  
For further specifications contact Technical Section.

LAST UPDATE: 24/04/1998