




## FIXED CALIPER

P 30 C

20.2006.11

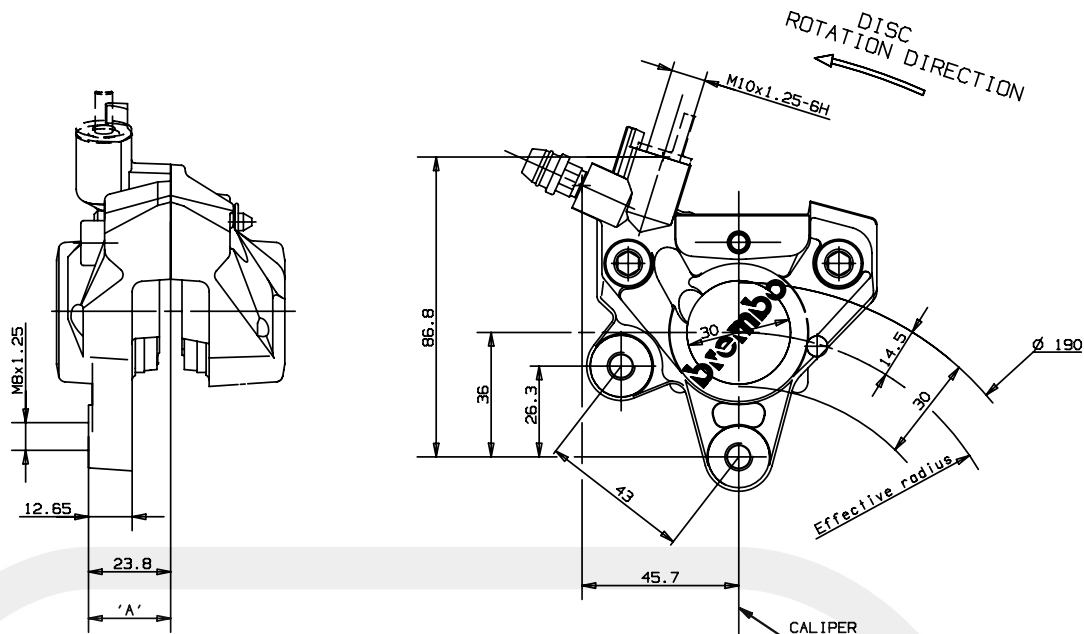


### DESCRIPTION

Fixed caliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one pin.

Construction Material: Aluminium Alloy.  
Operating fluid: brake fluid DOT4.

N.B.: drawing shows left side caliper.  
Mounting side behind the fork.

### PADS SHAPE AND DIMENSIONS

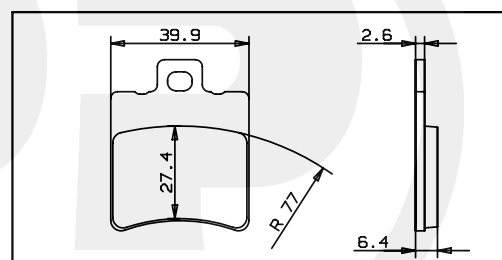

### TECHNICAL CHARACTERISTICS

Pistons number and diameter: 2 30 mm  
MAX working pressure: 70 bar  
A) Disc position (TOLERANCE): ±0.4 mm

Average pad surface (1 pad): 10.5 cm²  
Weight (with not sintered pads): 0.490 Kg

### CONFIGURATION

CODE CALIPER \ CHARACT.	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.2006.11	FERIT 4424	GOLD	SX	3.5 mm	6.4 cm³

### AVAILABLE SPARE PARTS

CODE CALIPER \ SPARE PARTS	PADS	BLEEDER SCREW	DUST COVER	PIN PAD SPRING CLIP
20.2006.11	207.5365.15	205.3246.14	205.1502.11	220.2800.64

Indicating informations subject to modification.  
For further specifications contact Technical Section.

LAST UPDATE: 19/06/2000