


# FIXED CALIPER


P 30 b 20.9860.11

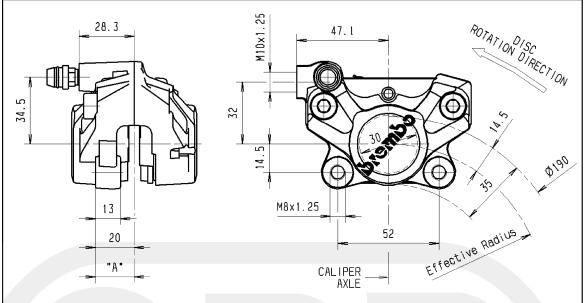

#### DESCRIPTION

Fixed caliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one pin. Construction Material: Aluminium Alloy. Operating fluid: brake fluid DOT4.

### PADS SHAPE AND DIMENSIONS



# TECHNICAL CHARACTERISTICS

Pistons number and diameter: 2 30 mm

MAX working pressure: 70 bar

"A" Disc position (TOLERANCE): ±0.5 mm

Average pad surface (1 pad):

13.6 cm<sup>2</sup>

Weight

(with not sintered pad):

0.490 kg

### CONF [GURATION

CHARACT. CODE CAL IPER	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.9860.11	FERIT 4424	GOLD	SX	3.5 mm	5.5 cm <sup>3</sup>

# AVAILABLE SPARE PARTS

SPARE CODE PARTS CAL IPER	DE PARTS PADS		DUST COVER	PIN PAD SPRING CLIP
20.9860.11	107.6966.11	105.3246.14	105.1502.10	120.2800.65

Indicating informations subject to modification. For further specifications contact Technical Section.

LAST UPDATE: 29/07/2005