

GILLES TOOLING KG

Anbauanleitung / installation manual

ABK-ME-B-AL

Montage Ausleger Kit mounting extension kit

Aprilia RSV Mille
Mille R

VarioBar

Links :

- 1) Original Lenker demontieren.
- 2) Lenkerarmaturen montieren wie in Anleitung „Basis Kit“, Züge und Kabel verlegen wie in Bild 1.
- 3) Original Lenkanschlagscheiben an der unteren Gabelbrücke gegen mitgelieferte tauschen.

On the left side:

1. Dismantle the origin handlebar.
2. Install the handlebar instruments as in manual "basis kit". Lay the wires and cables as in picture 1.
3. Exchange the original steering lock corrolars at the under fork bridge with the delivered.



Bild 1

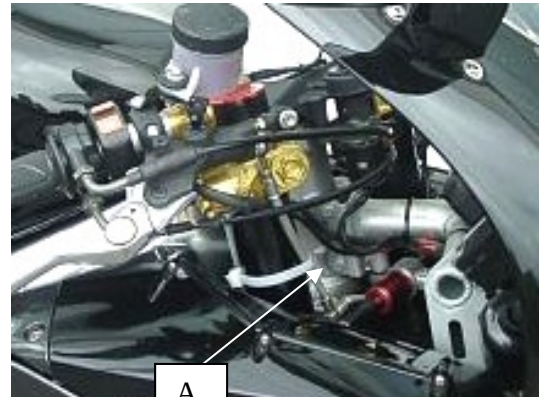


Bild 2

Rechts:

- 4) Original Lenker demontieren.
- 5) Lenkerarmaturen montieren wie in Anleitung „Basis Kit“ beschrieben.
- 6) Bremsleitung an der unteren Gabelbrücke lösen , und mit Kabelbinder, so am Gabelholm befestigen, dass er beim Einschlagen nicht gegen den Lenkungsämpfer kommt.(Bild 2[A])

On the right side:

4. Dismantle the origin handlebar.
5. Install the handlebar instruments as in manual "basis kit".
6. Dismantle the brake hose at the under fork bridge and install it at the fork cross-tie with cable clamps, that it don't touch the steering absorber.



Abschließend kontrollieren , ob alle Züge und Leitungen freigängig sind und nirgends scheuern.

Finally be cautions that all wires and cables have enough room to other components.